DISCHARGE ROD

HIGH VOLTAGE DISCHARGE ROD
MODEL - KM-DSR-35K / KM-DSR-50K / KM-DSR-100K




NEW

✷ **FEATURES :**


- For discharging and earthing for cables
- For discharging and earthing of test units
- For safety purpose
- Cable length 5.3 meters approx.

MODEL	KM-DSR-35K	KM-DSR-50K	KM-DSR-100K
kV	35kV	50kV	100kV
Weight	1.2 kg approx.	1.4 kg approx.	2.0 kg approx.
Resistance	**70kΩ**	**100kΩ**	**200kΩ**


KM-DSR-35K

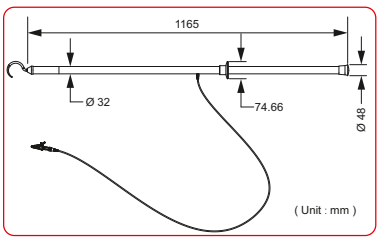

KM-DSR-50K

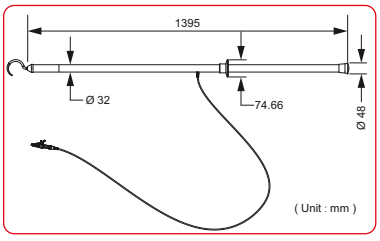

KM-DSR-100K

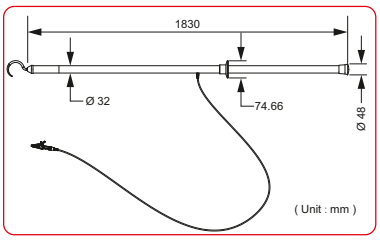

765KV HIGHLY INSULATED DISCHARGE ROD
MODEL - KM 765DR

NEW



"KUSAM MECO" Highly insulated FRP Telescopic Earth / Discharge Rod Manufactured in fully automatic Pultrusion Plant having strong Electrical & Mechanical Strength.

✷ **SPECIAL FEATURES :**

- **Material :** FRP Pultruded.
- **Process :** Automatic Pultrusion Plant.
- **Surface :** Smooth and Glossy.
- **Design :** Telescopic Type.
- **Locking :** Push Button type Locking System.
- **Total Section :** 05 Section
- **Assembled Length :** 24 feet Length (Excluding top clamp)
- **H.V.Test :** 110 KV
- **Glass Content :** 65 %.
- **Top Section Dia :** 33.0 mm
- **Bottom Section Dia :** 53.30 mm
- **Earthing :** Die cast Alu. Earthing instrument for 30mm Dia
- **Cable :** 35 sq. mm copper cable 10 mtr. long.
- **Clamp :** Crocodile grounding clamp.
- **Cover :** Cover including.